
Holdfast

HF819-LH

135 Degree Grab Rail (Left Hand)



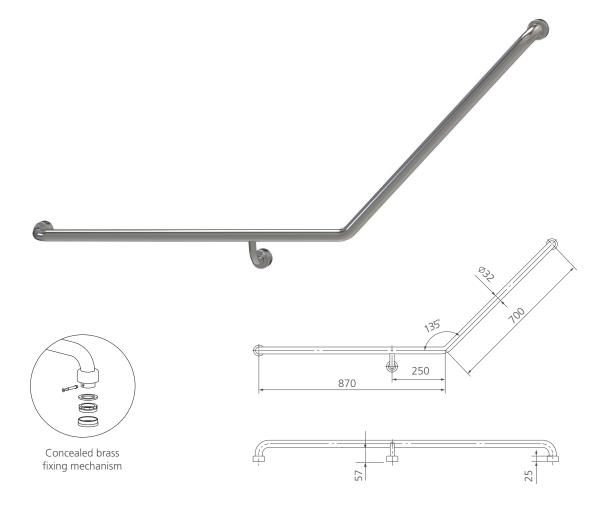

Specifications /

Diameter 32 mm
Domestic and commercial care
Right hand version also available
Brass base and connector with secure flange pin and cover to conceal wall fixings
Can be installed to comply with AS 1428.1 (load rating > 1100 N)
Satin stainless steel 304 (1.2 mm thick railing tube)
2.1 kg
Grab rail, flange covers and fixings
15 years replacement parts and 1 year labour (see Oliveri website for full details)
All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.



