# Naples


NA380CH (Pan: NA380CH-P / Cistern: NA380CH-C / Seat: NA380CH-ST) Comfort Height Back To Wall Toilet Suite





470 (Seat) 480 (Lid)

450 (Pan)

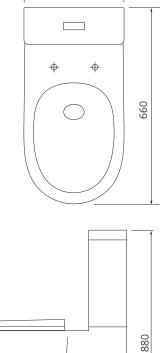

375

### Specifications /

WELS rating	4 star, 3.5 L avg flush volume (4.6 L / 3 L)
WELS registration number	L08389
Pan	Tornado flush / rimless design
Traps	Universal (S or P Trap)
Set outs	S-trap set out: 100 mm - 180 mm as standard. P-trap set out: 180 mm floor to centre of outlet. Optional S-trap set out: 150 mm - 220 mm (ZH 6201)
Inlet	Bottom or back inlet
Cistern	R&T flush valve (4.6 L / 3 L)
Fixing	The cistern is fixed directly to the pan with a robust concealed base fixing.
Seat	Soft close and quick release toilet seat is provided as standard. Compression moulded toilet seat, fitted with buffers and metal hinges.
Colour	White
Installation	The installation of the toilet suite shall be in accordance with the normal minimum drain line grade requirements in AS/NZS 3500.2. Can be installed for AS 1428.1 Ambulant compliance.
Materials	Vitreous china
Weight	Pan 42.0 kg, cistern 15.0 kg, seat 2.8 kg
Warranty	20 years vitreous china cistern and pan replacement of product; 5 years replacement seat; 2 years valves and fittings; 1 year seals and labour (see Oliveri website for full details)
Maintenance and care instructions	All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.









## Naples

NA380CH (Pan: NA380CH-P / Cistern: NA380CH-C / Seat: NA380CH-ST) Comfort Height Back To Wall Toilet Suite




**SET OUT DRAWING** 






Standard Pan Connector: Pan Set Out: 100 - 180

### **OPTIONAL SET OUT DRAWING**





Optional Pan Connector: Pan Set Out: 150 - 220





